



Everything about profitability
and charging experience

BT 240kW Series
DC Fast Charger




Overview


BT 240kW integrated charger is an integrated EV charger providing 240kW DC output with two connectors. Power flexible distributed to two connectors controlled by algorithm realizes intelligently EV charging. It supports high resolution large LCD touch screen with audio function and cable management system which provide better user experience.

Dimensions


W850*D750*2000mm

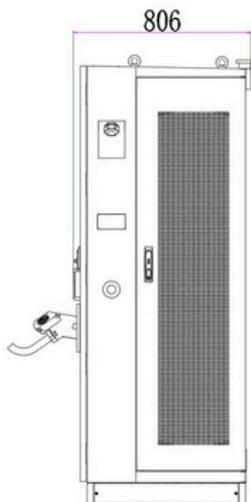

Right view

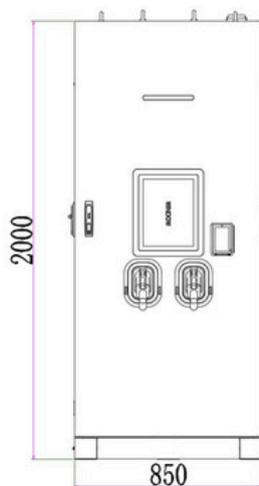

Front view

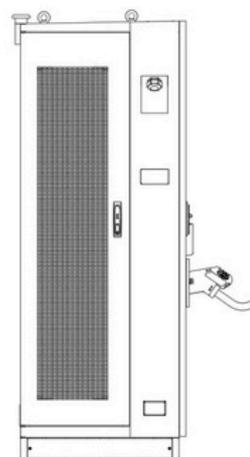

Left view



Rear view

Specifications

| 240kW Integrated Charger | | |
|--------------------------|---------------------------|---|
| Input Characteristic | Input voltage | 400 VAC +/- 10% |
| | Input frequency | 50 / 60 Hz |
| | Input type | 3P + N + PE |
| | Max Input current | 444A |
| | Max Input power | 263kVA |
| | Power factor | 0.99 |
| | THDi | <5% |
| | Grounding type | TN-S, TT |
| Output Characteristic | Connector options | CCS2 CCS2+CCS2 CCS2+CHA CHA is optional |
| | Output voltage | CCS2: 200-1000 Vdc CHAdeMO: 200-500 Vdc 300~1000V is the output voltage of constant power output. |
| | Maximum output current | CCS2: 350A CHAdeMO: 125A |
| | Rated power | DC: 240kW |
| | Peak efficiency | 96% |
| Environment | Operational altitude | <2000 m |
| | Operating temperature | -25 °C to +65 °C |
| | Temperature derating | Up to 50 °C: 100% output power, 50-65 °C interval, linear power limit, 65 °C or more, module shutdown protection. |
| | Storage temperature range | -30 °C to +70 °C |
| | Humidity | 5 %-95 % Rh non-condensing |
| Structure | IP and IK rating | IP55/ IK10 |
| | Dimensions | W850mm*D750mm*H2000mm |
| | Weight | ≤500 kg |
| | Enclosure material | Stainless steel |
| Components | Cable length | 5m (4.5m exposed from the charger) |
| | Screen | 15" HD touchscreen |
| | RFID Reader | ISO 14443 A + B to part 4 and ISO/IEC 15693, Mifare1, NFC |
| | Emergency button | Yes |
| Others | Communication interface | 4G / LAN Port |
| | Language | English (Support customizing other languages) |
| | Communication protocol | OCPP1.6J |
| | Cooling method | Air cooled |
| | Payment method | RFID / APP |

| | | |
|-------------------------------------|--------------------|---|
| | | (Mobile phone / Visa / Master is optional) |
| | EMC | Class A (industrial) |
| | Protection | Undervoltage protection, Overvoltage protection, DC Overcurrent protection, Over-temperature protection, Surge Protection Device, Emergency Stop Protection |
| | Barrier design | Yes |
| | Optional functions | Cable management, tilt detection, flood detection, smoke detection, heater, cable management |
| Standards and Certifications | Standards | IEC 61851, IEC 62196, DIN 70121, ISO 15118, etc. |
| | Certifications | CE, TUV |



Everything about profitability
and charging experience