



Everything about profitability
and charging experience

BT 80kW Series
DC Fast Charger




Overview

The BT 80kW is an integrated DC fast charger that features high efficiency and flexible configured. It supports the multiple connector charging at the same time and adopts compact design, with a smaller area covered.

The Charger used in centralized fast charging station, it adopts 20kW charging power module of Bitek, and meet the charging demand of larger capacity and high endurance electric on the market.

Dimensions

W850*D500*H2030mm

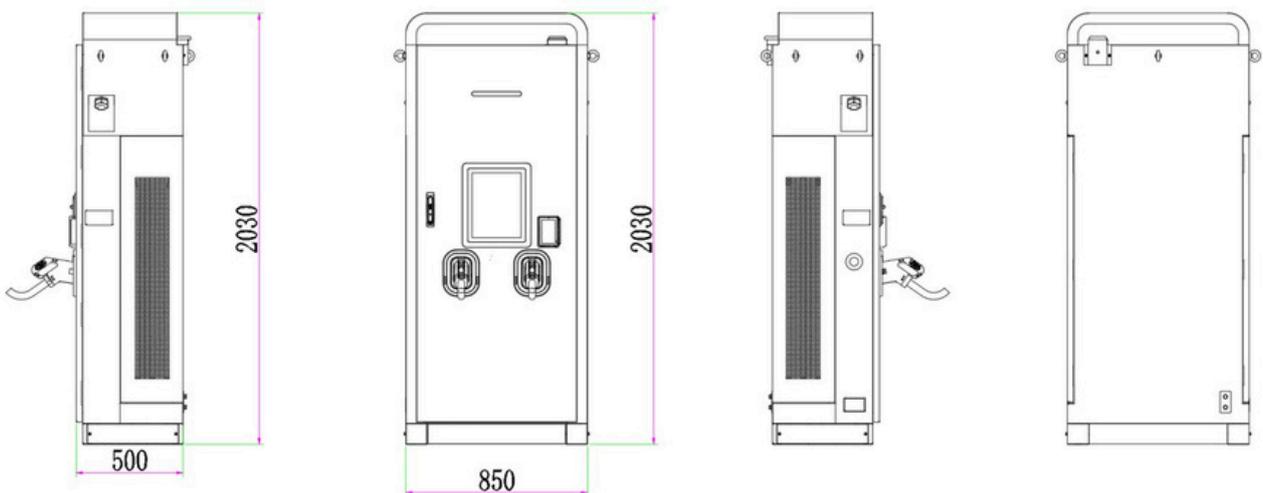

Specifications

80kW Integrated Charger

| | | |
|------------------------------|---------------------------|--|
| Input Characteristic | Input voltage | 400 VAC +/- 10% |
| | Input frequency | 50 Hz/ 60 Hz |
| | Input type | 3P + N + PE |
| | Max input current | 150A |
| | Max input power | 89kVA |
| | Power factor | 0.99 |
| | THDi | <5% |
| | Grounding type | TN-S, TT |
| Output Characteristic | Connector options | CCS2 CCS2+CCS2 CCS2+CHA |
| | Output voltage | CCS2: 200-1000 Vdc CHAdeMO: 200-500 Vdc 300~1000V is the output voltage of constant power output. |
| | Maximum output current | CCS2: 200A CHAdeMO: 125A |
| | Rated power | DC: 80kW |
| | Peak efficiency | 96% |
| Environment | Operational altitude | <2000 m |
| | Operating temperature | -25 °C to +65 °C |
| | Temperature derating | Up to 50 °C, 100% output power; 50-65 °C interval, linear power limit; 65 °C or more, module shutdown protection |
| | Storage temperature range | -30 °C to +70 °C |
| | Humidity | 5 %-95 % Rh non-condensing |
| Structure | IP and IK rating | IP55/ IK10 |
| | Dimensions | W850*D500*H2030mm |
| | Weight | ≤350 kg |
| | Enclosure material | Stainless steel |
| Components | Cable length | 5 m (total, outside charger 4.5m) |
| | Screen | 15" HD high-contrast touchscreen |
| | RFID Reader | ISO 14443 A + B to part 4 and ISO/IEC 15693, Mifare1, NFC |
| | Emergency button | Yes |
| | Communication interface | 4G / LAN Port |
| | Language | English (Support customizing other languages) |
| | Communication protocol | OCPP1.6J |
| | Cooling method | Air cooled |
| | Payment method | RFID / APP (Mobile phone / Visa / Master is optional) |

| | | |
|-------------------------------------|--------------------|---|
| Others | EMC | Class A (industrial) |
| | Protection | Undervoltage protection, Overvoltage protection, DC Overcurrent protection, Over-temperature protection, Surge Protection Device, Emergency Stop Protection |
| | Barrier design | Yes |
| | Optional functions | Cable management, tilt detection, flood detection, smoke detection |
| Standards and Certifications | Standards | IEC 61851, IEC 62196, DIN 70121, ISO 15118, etc. |
| | Certifications | CE, TUV |



Everything about profitability
and charging experience